

Process for the construction of a segment of an open-air work by prefabricated structural members, and prefabricated structural member related thereto

The present invention generally refers to open-air works, such as road overpasses, underpasses, bridges, artificial tunnels, garages, underground parkings or similar, which are erected on a substantially level area, possibly obtained by the execution of a digging before making the work.

More specifically, the invention refers to open-air works made in a modular manner, that is using a series of segments which have a general portal shape and are installed in succession along an axis of the work, until the desired dimensions of the work are reached.

In particular, the invention relates to a process for the construction of a segment of an open-air work by prefabricated structural members of reinforced concrete, having the features mentioned in the preamble of appended claim 1.

A process of the type defined above is known from EP-A-219 501 and EP-A-861 358. Both these documents refer to the manufacturing of open-air works by virtue of the

use of prefabricated modular structural members of the articulated type. These structural members have the advantage of being able to be produced and transported to the place of use in the extended configuration, since their dimensions in this condition do not exceed the limit shape allowed for the road transport. When they are installed, they are raised so as to fold the reinforcing rods projecting between adjacent bodies of each member, until each member reaches its final configuration.

If the span of the work is not wider than approximately 5 m, prefabricated structural members comprising five bodies separated by four articulations can be used. These members are intended to assume, in their installed condition, a portal or overturned-U shape which defines two parallel support uprights and the vault of the work, and allows to realize closed-frame box structures. The use of these structural members requires, after the installation of the prefabricated members, the manufacturing of a base concrete bed or mat in order to incorporate the support feet of the several prefabricated members and the reinforcing rods extending from the end bodies of such members.

If the span of the work is between 5 and 15 m

approximately, prefabricated structural members having the shape of a bevelled overturned-L, in the installed condition, are used, which are placed side by side in pairs so that each pair of members constitutes a segment having a portal shape. Each of these prefabricated members comprises three bodies separated by two articulations and rests in an articulated manner through a so-called "static hinge" on a respective continuous foundation plinth. A further "static hinge" is made between the two members which constitute each segment of the work, in such a manner that each segment has a general structure of the triple-hinge arch type, one of which is in the center and two of which are at the base.

The structures manufactured by means of the known prefabricated elements described above have the advantage of being able to be manufactured in an extremely quick manner and of being at the same time very steady and reliable. In general, the segments of such structures, once installed, form a completely steady unit also before sealing concrete castings between the several bodies which constitute the prefabricated members are executed.

The main object of the present invention is to provide

a process for the construction of segments of an open-air work by prefabricated structural members which, in addition to keep the advantages of the structures described above unchanged, allows to achieve a reduction of the costs for the execution of the work.

This object is reached by a process having the features set forth in claim 1.

By virtue of these features, in order to manufacture each segment of the work, it is simply necessary to place side by side two prefabricated structural members and form a concrete casting above them in order to make a beam, so that each segment has a static arch structure of the type having only two hinges each of which is arranged at the base of a respective upright portion of the respective structural member. In this manner, the cover portion of each segment together with the respective beam cast during the work, which is similar to a beam having its ends fixed, bears a positive moment in the middle and negative moments near to the uprights or standards. By virtue of this fact, the maximum bending moments applied to the structure, on the same terms of span and external load, are smaller than those acting on the known structures described above, whereby a structural member according

to the invention can be manufactured so as to be less thick and lighter. It is therefore possible to considerably reduce the cost for the execution the work thanks to the material saving which can be achieved during the manufacturing of the single structural members constituting the work. The transportation costs turn out also to be reduced because of the structural members are lighter on the same terms of span and sturdiness of the structure to be manufactured. Moreover, a structure manufactured in this manner allows the waterproofing of the work to be made easier and more reliable, since the upper portion of its cover is completely smooth after the execution of the concrete casting for forming the beam and for finishing.

Moreover, the invention has for object a prefabricated structural member having the features of claim 6.

By virtue of the fact that the structural member of the invention has a cavity at its cover portion, which is intended to receive a portion of a beam cast during the execution of the work above the two symmetrical structural members constituting each segment of the work, the structure of the member itself can be manufactured so that it is thinner and lighter than

that of the previously known structural members.

Such a structural member turns out to be particularly advantageous with respect to the known structural members used for manufacturing closed-frame box structures, each of which forms a whole segment of the work, since it has a smaller length and involves therefore smaller overall dimensions during the transportation, above all owing to the fact that it neither requires bearing feet to be incorporated in a base concrete bed of the work which have to be cast after the installation of the members, nor reinforcing rods to allow the connection between the concrete bed and the upright portions of each segment of the work, during the execution of the work.

A structural member according to the invention turns out to be also advantageous with respect to the known structural members intended to form in pairs segments with triple-hinge arch structure, because it has a smaller thickness by virtue of the fact that the segments of the work manufactured in this manner have a structure similar to that one of a double-hinged arch and therefore, on the same terms of span and external load, the maximum bending moments applied to the structure are smaller than those bearing on the

previously known members with a three-hinge structure. A material saving, and therefore a reduction of production and transportation costs, corresponds to the smaller thickness of the structural members. Owing to the presence of the beam cast above the two structural members during the execution of the work, each segment of the work is able to bear positive bending moments which have a high value at the middle, and therefore at the zone of the joint between each pair of structural members.

Moreover, thanks to the fact that the cavity made in the cover portion of the bracket body forms a longitudinal channel opened axially in correspondence of its free end, prefabricated members according to the invention can be manufactured with different length by using a same formwork provided with a removable transversal plate which can be positioned according to several axially separated positions in order to form structures having different span, so that the length of the structural member to be manufactured can be limited in the desired manner. This is possible by virtue of the fact that the structural members of the invention lack a transversal wall at the free end of the bracket cover portion, which instead had to be arranged in the previously known structural members in order to delimit

the zone in which the central hinge of each segment of the work had to be made.

Further characteristics and advantages of the invention will turn out to be more clear from reading the following detailed description, which has been provided as a non-limitative example and has been made with reference to the appended figures, in which:

figures 1 and 2 are front elevational views showing a first and a second phase of the manufacturing of a work according to the invention,

figures 3 and 4 are enlarged views similar to those of figures 1 and 2, showing other manufacturing phases of a work according to the invention,

figure 5 is a sectional view in greater scale, along line V-V of figure 4, and

figures 6 and 7 are front elevational views similar to figures 1 and 2, showing further manufacturing phases of a work according to the invention.

With reference to the figures, an open-air digging executed under the ground level P is generally indicated 10, the execution of which allows to realize an open-air work such as the structure of a highway overpass or an underpass, a bridge, a tunnel or an



underground garage.

At the bottom of the digging 10, a base structure of the work is made, for example constituted by a pair of continuous foundation concrete beds 12, each of which has on the top a depressed seat 14. As an alternative, the base structure of the work can be made by means of a single concrete bed, or by two piling heads or other kinds of foundations of a type known per se.

Conveniently, in the zone of the digging between the concrete beds 12, a portable scaffolding or trestle 16 is erected, having the function of a temporary support element for the manufacture of the work, as it will turn out to be more clear in the following of the description.

A first structural member 18 is installed by resting the free end 20 of an upright portion 22 of it in a seat 14 of the respective foundation concrete bed 12, and the free end 24 of a bracket cover portion 26 of it on a counter member of the scaffolding 16.

Likewise, a second structural member 19, equal to the member 18, is installed by resting the free end 20 of its upright portion 22 in the seat 14 of the respective

foundation concrete bed 12, and the free end 24 of its bracket cover portion 26 on another counter member of the scaffolding 16, so that its free end 24 is brought into contact with the free end 24 of the other structural member 18. The two structural members 18 and 19, coupled in this manner, form a portal shaped structure for the purpose to constitute a segment 15 of a work defined by a plurality of similar segments 15, arranged in succession along the axis of the work itself.

In order to allow the fine adjustment of the mutual positioning of the members 18 and 19, they can be provided, at their free ends 24, with adjustable extension support members 25, for example constituted by screws engaging respective nut screws fixed to the free ends 24 and having a head which can be used both like a shoulder for the free end 24 of the opposite structural member, and like a control portion of the screw itself. By changing the extension of the members 25 it is therefore possible to reach a resting condition of the members 18 and 19, which is adjusted in an optimal manner.

Preferably, the members 18 and 19 are prefabricated structural members of the articulated type, and each of

them includes a plurality of reinforced concrete bodies reciprocally connected by means of main reinforcing rods projecting in the zones located between the adjacent reinforced concrete bodies. In particular, if the members 18 and 19 are articulated prefabricate members, their upright portions 22 are constituted by a first rectilinear end body or upright, and their bracket cover portions 26 are constituted by a second rectilinear end body opposite to the first end body. A slanted portion 28, constituted by a respective rectilinear intermediate body, is interposed between the two bodies constituted by the portions 22 and 26. The bodies constituted by the portions 22, 28 and 26 of each member 18 and 19 can be articulated as a result of the bending of the main reinforcing rods in correspondence of their zones between adjacent reinforced concrete bodies, so as to allow the two structural members 18 and 19 to assume, starting from their extended configuration for the transport, their configuration of installation in the form of an overturned and bevelled "L" or "U".

A static hinge is made in a manner known per se at the free end 20 of the upright portion of the members 18, 19, in order to allow the members 18 and 19 to rest on the respective foundation concrete beds 12 at least

with a limited possibility of rotation. To such a purpose, each member 18, 19 has an appendage 21 delimited by a convex cylindrical surface intended to rest on the seat 14, which constitutes a half-portion of the static hinge. The other half-portion of the static hinge is formed by the execution of a casting between the seat 14 and the free ends of the portion 22 of the members 18, 19. When the casting is hardened, it defines the second half-portion of the static hinge, the shape of which corresponds and is complementary to that one of the first half-portion. Preferably, a packing of anti-friction material, for example constituted by a sheet of high-density polyethylene (not illustrated), is interposed between the two half-portions of the hinge before the casting intended to form the second half-portion of the static hinge is executed.

The bracket cover portion 26 has a hollow substantially U shaped cross-sectional section, delimited downwardly by a bottom 30 and sideways by a pair of sidewalls 32 which extend perpendicularly to the bottom 30. The sidewalls 32 are preferably tapered so that their height decreases towards the free end 24 of the portion 26. The bottom 30 and the sidewalls 32 define a channel 34 which is open at the free end 24. The channel 34 is

intended to receive a portion of a casting 36, executed during the work, so as to be superimposed to the members 18 and 19 of each segment 15 of the work.

Conveniently, secondary reinforcing rods 38, intended to be incorporated in the casting 36, extend upwardly from the sidewalls 32 of the bracket portion 26.

Preferably, an additional reinforcement 40, constituted by auxiliary reinforcing rods 42, is inserted inside the channel 34 before the execution of the casting 36, as schematically indicated by arrow A of figure 3.

The casting 36 can be advantageously executed in order to form simultaneously a single slab for a plurality of contiguous segments 15 of the work, as more clearly illustrated in figure 5. In such a manner, the casting 36 constitutes a single slab of the work and concurs to provide an effective cross-sectional connection of the segments 15. To such a purpose, before the casting 36 is executed and before the rectilinear reinforcements 40 are inserted in the respective channels 34 of the structure, also reinforcing rods 44 and 46 are inserted both transversely to the axis of the work in a position interposed between the contiguous segments 15 and above the reinforcements 40, as well as longitudinal

reinforcing rods 48 in proximity of the free ends 24 of the cover portions 26, in correspondence of spaces 50 defined between adjacent bodies of the structural members 18 and 19, and upon the rectilinear reinforcements 40.

When the casting 36 is hardened, the space remaining between the bottom and the sides of the digging 10 and the outside flanks of the work can be filled up so as to restore the embankment to the ground level P, on the completed work.

CLAIMS

1. Process for the construction of a segment of an open-air work by prefabricated structural members of reinforced concrete, comprising the steps of:

- arranging a first and a second prefabricated structural members (18, 19), each of which includes an upright portion (22) and at least a cover portion (26) connected to the upright portion (22),
- installing the first structural member (18) by resting a free end (20) of its upright portion (22) on a respective foundation portion (12),
- installing the second structural member (19) by resting a free end (20) of its upright portion (22) on a respective foundation portion (12), in such a manner that the two structural members (18, 19) are arranged symmetrically with the free ends (24) of the cover portions (26) of the first and of the second structural member (18, 19) arranged mutually opposite,

characterized in that each of the two structural members (18, 19) has a cavity in correspondence of said cover portion (26), in that the cavities of the two structural members (18, 19) are substantially aligned in order to constitute a continuous channel (34), and in that it includes the operation of executing a casting (36) during the work, within the said

continuous channel (34), in order to made a beam superimposed to the two structural members (18, 19) and fastened to them.

2. Process according to claim 1, characterized in that each structural member (18, 19) is a prefabricated member including a plurality of reinforced concrete bodies (22, 28, 26) connected to each other by means of main reinforcing rods which project between adjacent reinforced concrete bodies (22, 28, 26), each structural member (18, 19) being adapted to be articulated as a result of the bending of the main reinforcing rods, and in that the step of installing the structural members (18, 19) comprises the bending of the main reinforcing rods until both the structural members (18, 19) assume a substantially overturned-L configuration.

3. Process according to claim 1 or 2, characterized in that it comprises the step of inserting a rectilinear reinforcement (40) constituted by auxiliary reinforcing rods (42) in the channel (34) defined by the cavities of the cover portions (26), before the casting (36) for forming the beam superimposed to the two structural members (18, 19) is executed during the work.



4. Process according to anyone of claims 1 to 3, characterized in that it comprises the step of inserting reinforcing rods (44, 46) transversely to the axis of the work between contiguous segments (15) of the work, and reinforcing rods (48) parallel to the axis of the work in proximity of the free ends (24) of the cover portions (26) of the structural members (18, 19) and in correspondence of spaces (50) defined between adjacent bodies (22, 28, 26) of the structural members (18, 19), and the phase of making simultaneously during the work a plurality of beams superimposed to respective segments (15) of the work, by means of a single concrete casting (36), so that the structural members (18, 19) of each segment (15) and a plurality of contiguous segments (15) of the work are connected to each other.

5. Process according to claim 4, characterized in that each structural member (18, 19) has an appendage (21) defined at the free end (20) of its upright portion (22) by a cylindrical surface, and in that the step of installing each structural member (18, 19) comprises the operation of forming, on the respective foundation portion (12), a cylindrical seat corresponding to said appendage (21) by means of a

concrete casting executed during the work between the structural member (18, 19) and the respective foundation portion (12), so that a static hinge for the articulation of the structural member (18, 19) with respect to the foundation portion (12) is made, a packing of anti-friction material being preferably interposed between said appendage (21) and said cylindrical seat.

6. Prefabricated structural member for the manufacturing of a segment (15) of an open-air work, comprising an upright portion (22) for resting the structural member (18, 19) on a foundation portion (12), and at least a cover portion (26) connected to the upright portion (22),

characterized in that said cover portion (26) has a cavity (34) intended to receive a portion of a continuous beam made by means of a casting (36) executed during the work, which is superimposed to a pair of structural members (18, 19) arranged symmetrically opposed.

7. A structural member according to claim 6, characterized in that it comprises a plurality of prefabricated bodies (22, 28, 26) of reinforced concrete, which are connected to each other by means of

main reinforcing rods which project between adjacent reinforced concrete bodies (22, 28, 26), in such a manner that the structural member (18, 19) can be articulated as a result of the bending of the main reinforcing rods in correspondence of zones between adjacent reinforced concrete bodies (22, 28, 26).

8. Structural member according to claim 7, characterized in that said reinforced concrete bodies include a first rectilinear end body defining an upright portion (22), an intermediate body defining a slanted portion (28) in the condition installed of the structural member (18, 19), and a second rectilinear end body defining a bracket portion (26), wherein said bracket portion (26) has a substantially U shaped cross-sectional section defining a longitudinal channel (30), the free end (24) of which, directed to the opposite of said intermediate body (28), being axially open.



9. Structural member according to claim 8, characterized in that said longitudinal channel (30) is delimited sideways by tapered sidewalls (32) the height of which decreases towards the free end (24) of the bracket portion (26).


10. Structural member according to claim 9, characterized in that secondary reinforcing rods (38) extend from said tapered sidewalls (32).

11. Structural member according to claim 10, characterized in that it is provided with adjustable extension bearing members (25) at the free end (24) of the bracket portion (26), in order to allow to change the distance thereof from another structural member (18, 19) arranged symmetrically and the respective opposite bracket portion (26).


12. Structural member according to anyone of claims 9 to 11, characterized in that said upright portion (22) has an appendage (21) at the free end (20), which defines a convex cylindrical surface intended to rest in a seat of corresponding shape manufactured during the work on a foundation portion (12) in order to rest the structural member (18, 19), a packing of anti-friction material being preferably interposed between said appendage (21) and said corresponding seat.

1/5

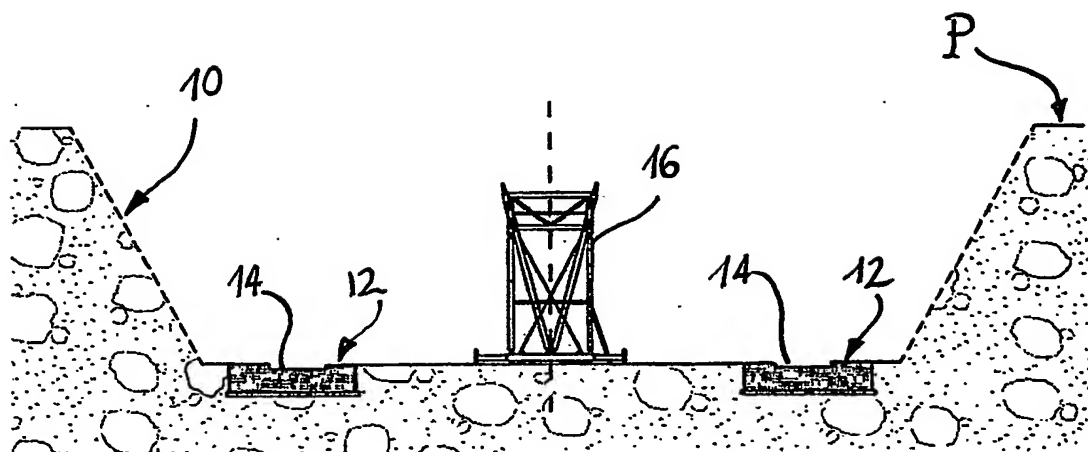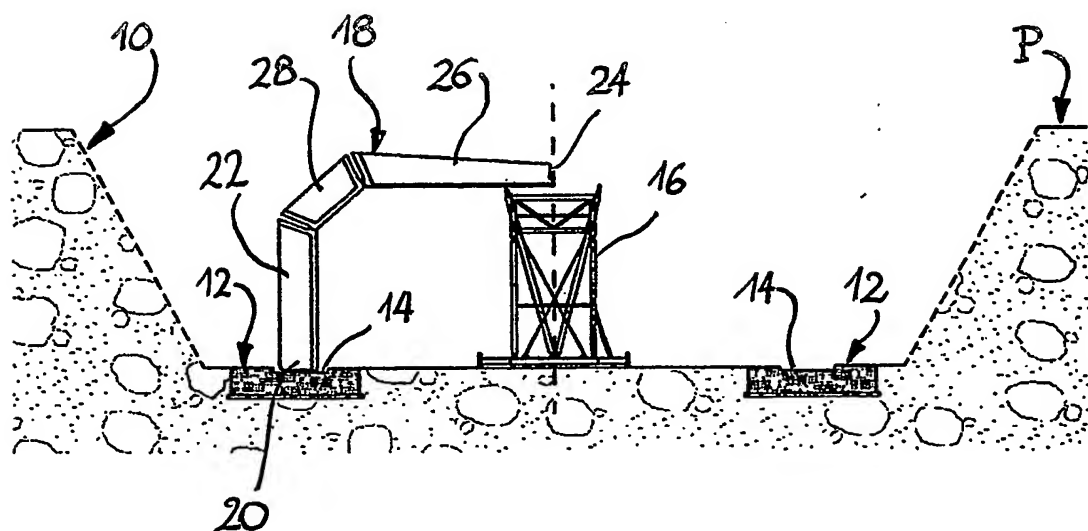**Fig. 1****Fig. 2**

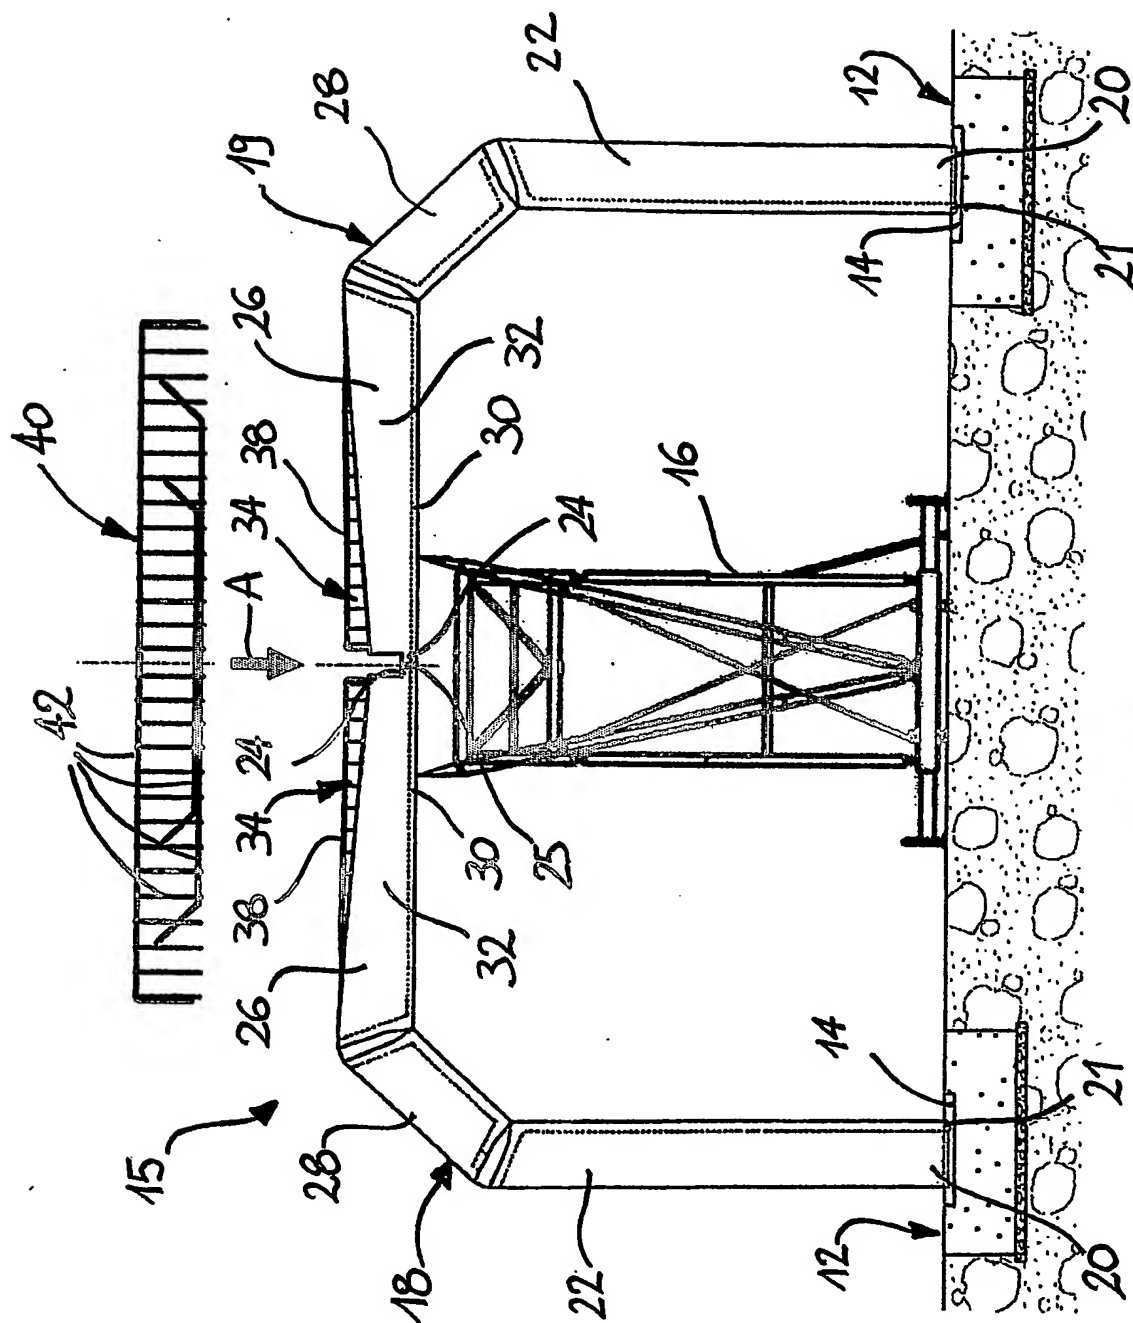

3/5

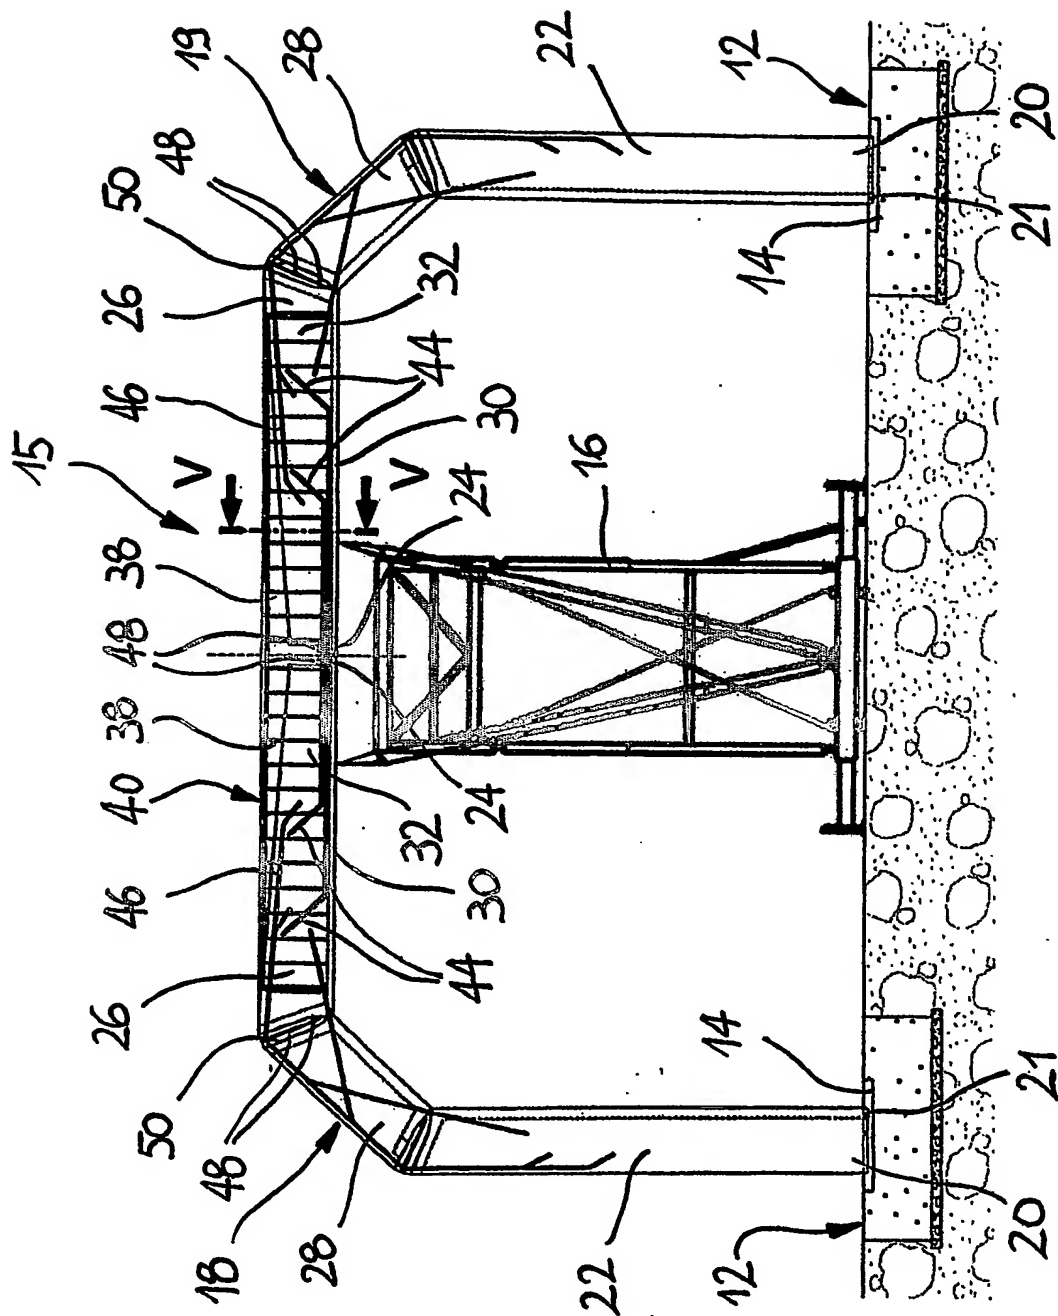**Fig. 4**


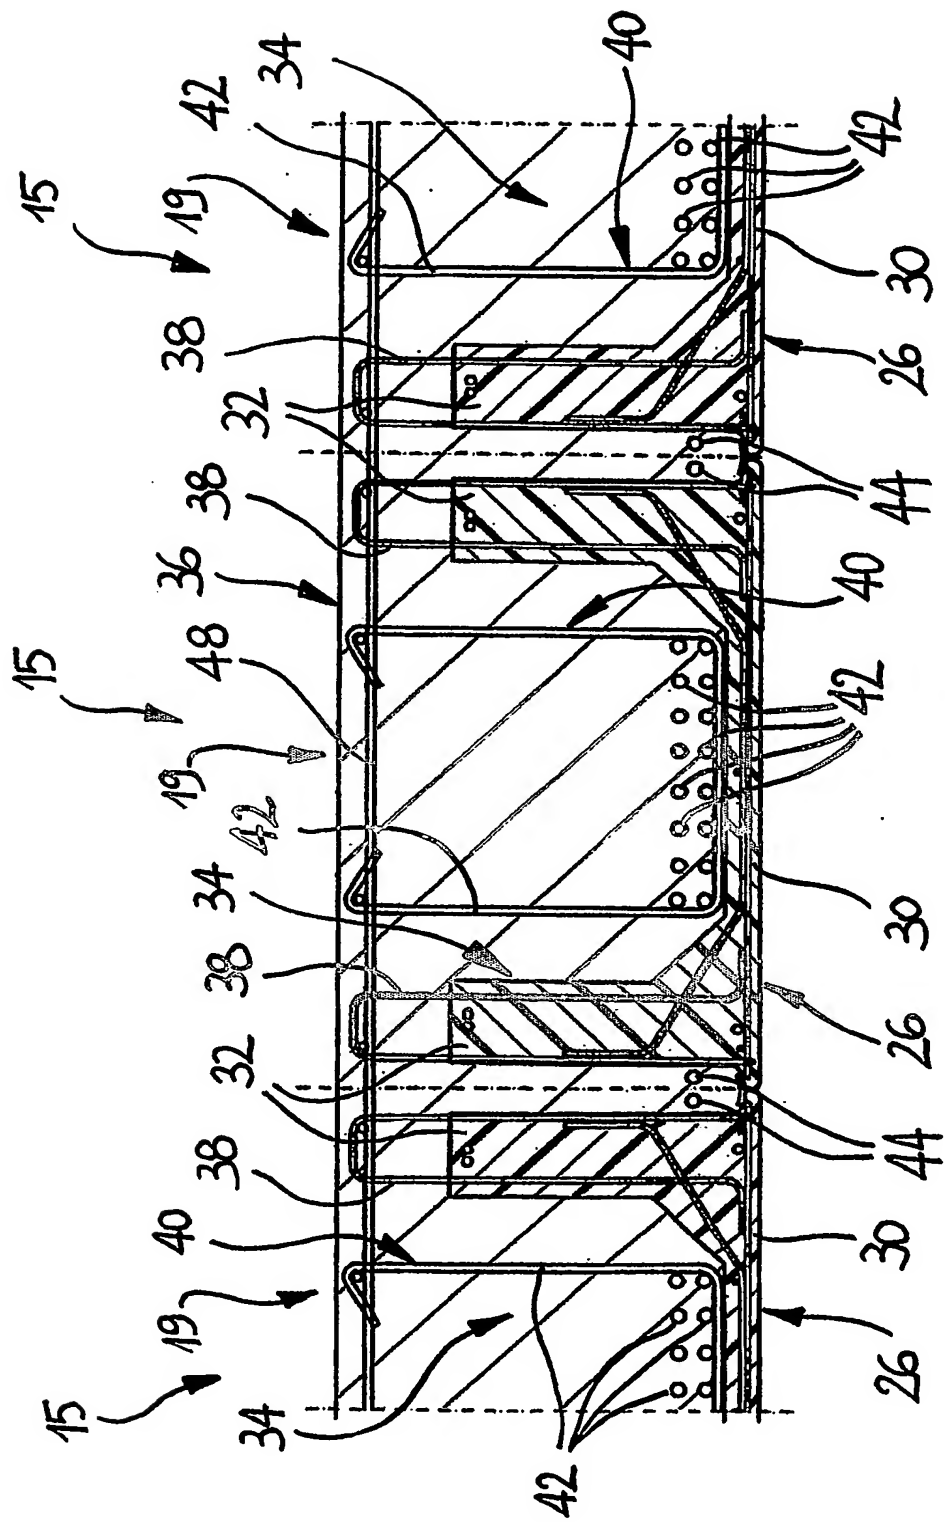



Fig. 5



5/5

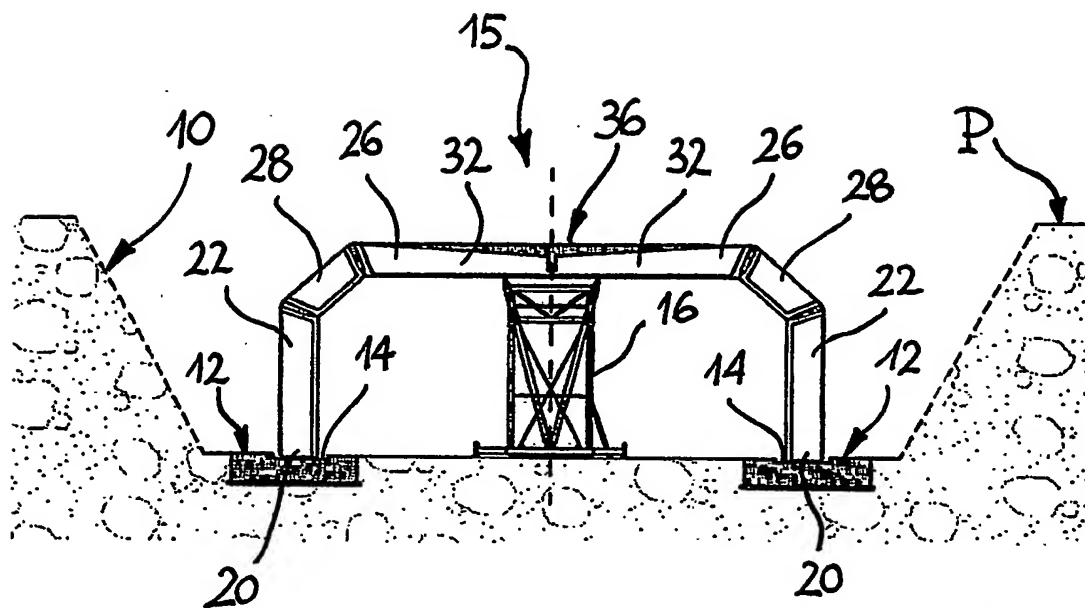

**Fig. 6**

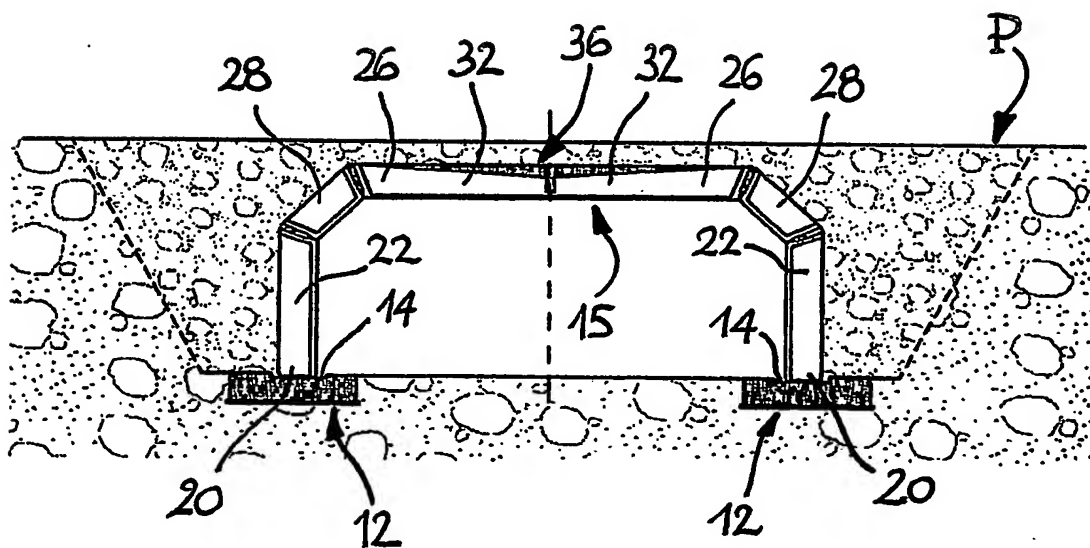

**Fig. 7**

## INTERNATIONAL SEARCH REPORT

International Application No.

PCT/EP2004/003101

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 E02D29/045 E04B1/344

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 E01D E02D E04B E04C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EP0-Internal, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 351 353 A (WALTERS) 4 October 1994 (1994-10-04) column 2, line 1-52; figures 1-4	1-3,7,8
Y	US 4 693 634 A (CHIAVES) 15 September 1987 (1987-09-15) figure 14	1-3,7,8
A	GB 766 213 A (BRAUNBOCK) 16 January 1957 (1957-01-16) figures 7,8	4,10
A	US 6 129 484 A (CHIAVES) 10 October 2000 (2000-10-10) column 3, line 4-45; figure 2	5,12
	--- -/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

28 June 2004

Date of mailing of the international search report

05/07/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Kergueno, J

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/EP2004/003101

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	FR 2 785 311 A (SAMFLO) 5 May 2000 (2000-05-05) page 3, line 34 -page 6, line 14; figures 1-3 -----	11

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP2004/003101

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5351353	A	04-10-1994	AU 642082 B2 GB 2254350 A ,B NZ 242122 A	07-10-1993 07-10-1992 27-01-1995
US 4693634	A	15-09-1987	IT 1180072 B AT 38409 T AU 573874 B2 AU 4546485 A BR 8507199 A CA 1226448 A1 DE 3566009 D1 DK 53486 A ,B, WO 8505653 A1 EP 0219501 A1 JP 6001038 B JP 61502406 T MX 164693 B SU 1484298 A3	23-09-1987 15-11-1988 23-06-1988 31-12-1985 04-08-1987 08-09-1987 08-12-1988 04-02-1986 19-12-1985 29-04-1987 05-01-1994 23-10-1986 17-09-1992 30-05-1989
GB 766213	A	16-01-1957	CH 314575 A DE 1045069 B	30-06-1956 27-11-1958
US 6129484	A	10-10-2000	IT T0950922 A1 AT 203579 T AU 7571396 A DE 69614134 D1 DE 69614134 T2 EP 0861358 A1 IL 124416 A WO 9719231 A1 ES 2162112 T3 PT 861358 T	19-05-1997 15-08-2001 11-06-1997 30-08-2001 14-03-2002 02-09-1998 06-12-2000 29-05-1997 16-12-2001 30-01-2002
FR 2785311	A	05-05-2000	FR 2785311 A1	05-05-2000